


Bộ đếm sét Ingesco CDR-Universal



► LIGHTNING STRIKE COUNTER INGESCO® CDR UNIVERSAL

Lightning strike counters with resettable system and installation in parallel.

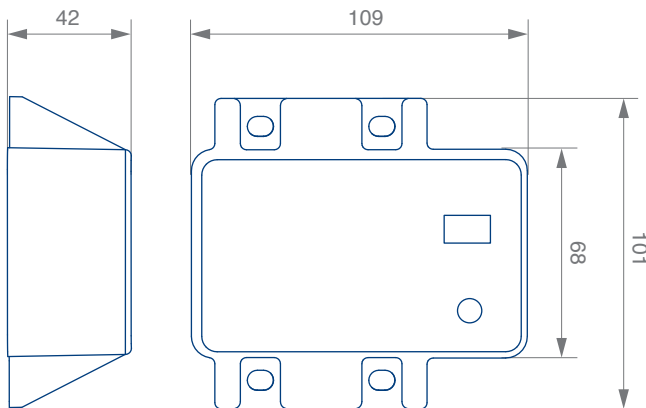

Ref. 432028
Measurements in mm

► applications

The lightning strike counter **CDR-UNIVERSAL**, is a compact and strong device designed to detect lightning strikes upon any external lightning protection systems (lightning rods, Faraday cages, etc.). The new isolated sensor of the **CDR-UNIVERSAL**, ensures the lightning strikes detection independently of the protection down conductor status, or the quality of the counter fastening to the down conductor.


► operation

CDR-UNIVERSAL detects the Electrical energy that is derived to ground through a conductor when a lightning impact occurs. The device registers each impact incrementing the counter in one unit each time. **CDR-UNIVERSAL** is installed in parallel without need to manipulate the down-conductor (cable, rod or plate), and does not require any type of external power, because it uses the electric energy of the lightning to operate. The magnetic sensor located inside the **CDR-UNIVERSAL** allows detecting the lightning current at the down-conductor without electric contact. This characteristic results in a bigger durability of the equipment in front of the strike and also a good operation whatever it is the protection down-conductor damage.

► norms and essays

The lightning strike counters installation at the down-conductors is showed at the following norms: UNE 21.186, NFC 17.102 y UNE-EN 62.305 to allow the control and the immediate verification of the installation of protection after each lightning impact: **"A lightning protection system must be verified after each lightning impact registered at the structure"**. The lightning strike counter **CDR-UNIVERSAL** is designed according to the operation requirements of standard IEC 62.561/6:2012, Components of protection against lightning (CPCR) Part 6: Requirements for the lightning strikes counter. Fulfill the requirements of the standard IEC 62.561/1:2012, Components of protection against lightning (CPCR) Part 1: Requirements for the fitting components. Tests carried out by **LABELEC**, electro technical test laboratory, accredited by ENAC (Accreditation number: 307/LE681).

Bộ đếm sét Ingesco CDR-Universal

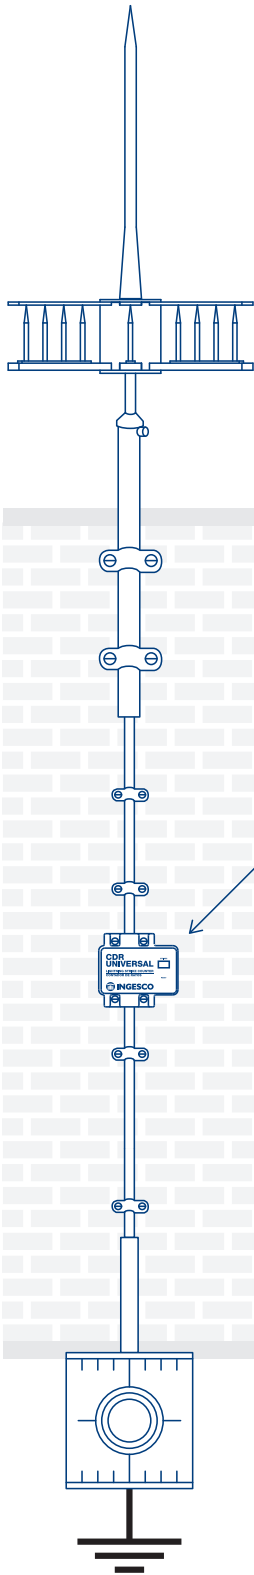

Lightning rod
installation scheme

► technical specifications

| | |
|---|---|
| Measurements | 101 x 109 x 42 mm |
| Weight | 490 gr. |
| Range of Intensity | 1 kA (8/20 μ s) - 100 kA (10/350 μ s) (según EN 50.164-6:2009) |
| Range of register | from 0 to 999 impulses |
| Working temperature | from -20°C to 65°C |
| Protection degree | IP 65 |
| Bypass connector (shunt) (cable/rod/plate) | 50 - 95 mm ² / 8 - 12 mm / 30 x 2 mm |

► characteristics of CDR-UNIVERSAL

- Great register capacity (999 impulses)
- Easy visual control
- Detection of impulses from:
 - Intensity min: 1 kA (8/20 μ s according to EN 50.164-6:2009)
 - Intensity max: 100 kA (10/350 μ s according to EN 50.164-6:2009)
- Designed exclusively for installation in parallel with the down-conductor, never in series (sectioned down conductor)
- Compact and Strong design.
- Resettable model.
- Detecting no ohmic contact: does not affect the status of the down conductor
- Durability
- Secure fastening by steel parts

► guarantees and benefits

- Fulfills standard norms UNE 21.186, NFC 17.102 and UNE-EN 62.305
- Easy adaptation to the down conductor of any lightning protection system
- Allows controlling the lightning rod condition
- Works in any atmospheric condition (from -20°C to 65°C)
- Offers updated and reliable information
- It does not need power supply
- Easy installation and operation

Remember:

According the standards norms NFC 17.102, UNE 21.186 and EN 62.305, each lightning protection system must be periodically checked, especially after any lightning impact on it.

<http://www.chongset.org>: nhà phân phối thiết bị đếm sét Ingesco CDR-Universal - Tây Ban Nha.
Tel: 028 6297 2398 - 0917 650 109 - Email: baominhtech@gmail.com - Website: <http://baominhtech.com>



DENA DESARROLLOS SL

Duero 5 | 08223 Terrassa | Barcelona | Spain
T 937 360 305 | T (+34) 937 360 314
F 937 360 312
export@ingesco.com



**LIGHTNING STRIKE
COUNTER INGESCO®**
CDR UNIVERSAL